



LED Street & Area Lighting Fixtures

Model:

HL-SL390W-2X50W

FEATURES

- Low installation and maintenance costs.
- IP67 Rating.
- High performance Cree 1W LEDs with 109lm/w.
- Light dimming engine.
- Led's operating life time over 100,000 hours at maximum output.
- Dedicated optical lens per LED for enhanced spread and uniformity.
- LED strings shunt protection.
- Aluminum housing for efficient heat dissipation.
- Ideal for solar or energy saving electrical applications.

SPECIFICATIONS

	HL-SL390W-2X50W
Description	50W LED Street & Area Lighting Fixture
Consumption	12V
Number of LEDs	50
Lumen/watt	109 LM/W
Intensity regulation	0%-100% in 10% increments
Maximum Total Luminous Flux	5,450 Lumen
IP Rating	IP67
Housing material	Aluminum & Stainless Steel




Length: 20.4 inch

Width: 12.6 inch

Height: 6.8 inch

Weight: 11 lbs.

DESIGN HL-SL390W-2X50W

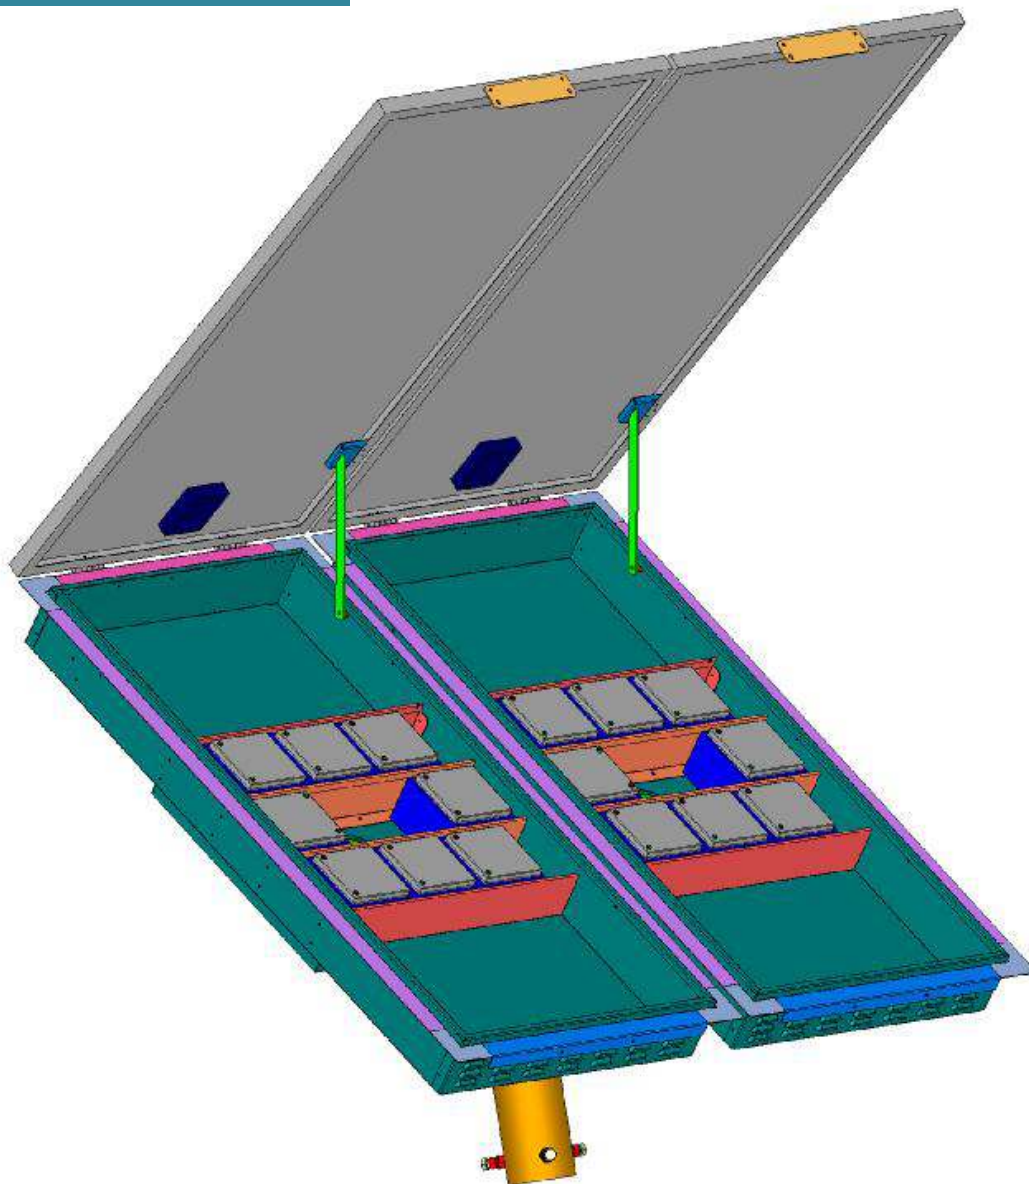

SPECIFICATIONS

HL-SL390W-2X50W

Description	Solar Lighting Engine
Voltage	12V
Solar Panel Type	Mono Crystalline Silicon
Battery type	Gel-Cell 16 battery's 12V \25AH
Unit Weight	548lbs
System profile	Run from Dusk to Dawn
Battery's backup	20 hours
Housing material	Aluminum & Stainless Steel

