

LED FLOOD LIGHT



Model:

HL-FL-50-1X9W

Rev. 10-12A


FEATURES

- Low installation and maintenance costs.
- IP67 Rating.
- High performance Cree 1W LEDs with 91lm/w.
- Light dimming engine.
- Led's operating life time over 100,000 hours at maximum output.
- Dedicated optical lens per LED for enhanced spread and uniformity.
- LED strings shunt protection.
- Aluminum housing for efficient heat dissipation.
- Ideal for solar or energy saving electrical applications.

SPECIFICATIONS

HL-FL-50W-1X9W	
Description	9W LED Street & Area Lighting Fixture
Consumption	12V
Number of LEDs	9
Lumen/watt	91 LM/W
Intensity regulation	0%-100% in 10% increments
Maximum Total Luminous Flux	819 Lumen
IP Rating	IP67
Housing material	Aluminum & Stainless Steel

DESIGN HL-FL-50W-1X90W

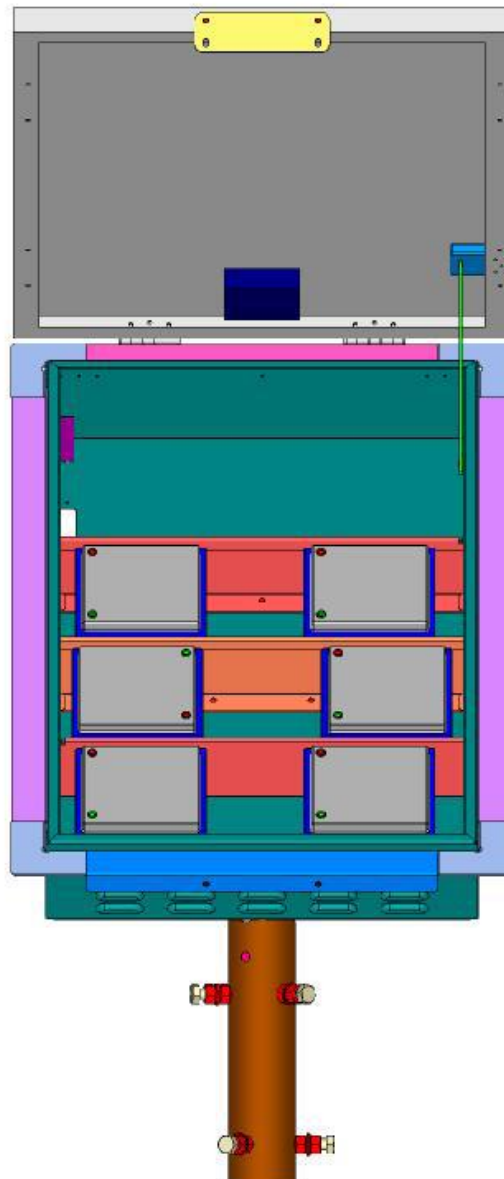

Rev. 10-12A

SPECIFICATIONS

	HL-FL-50W-1X9W
Description	Solar Lighting Engine
Voltage	12V
Solar Panel Type	Mono Crystalline Silicon
Battery type	Gel-Cell battery's 12V\55AH
Unit Weight	122lbs
System profile	Run from Dusk to Dawn
Battery's backup	12 hours
Housing material	Aluminum & Stainless Steel

