

# LED AREA LIGHT

## AURORA Series



AURORA series area light is perfect for outdoor area lighting, providing significant energy and maintenance savings while improving illumination performance.

### FEATURES & BENEFITS

- High lumen output and high mounting height solution.
- Slim & low profile design that minimizes wind load.
- Corrosion resistant polyester powder painted 100µm thickness.
- Meets a 1000-hour salt spray certification per ASTM B117/ ISO 9227:2012.
- Over 20 optical lenses are available for virtually any application.
- Adjustable arm that mounts to a horizontal or vertical 2 3/8" (60mm) O.D. tenon.
- Tenon length must be a minimum of 4.72" (120mm).
- -60~+30 degree or -90~+0 degree of adjustment for leveling when horizontally mounted.
- 10 years limited warranty available.


### CERTIFICATIONS

UL/ CUL/ DLC/ LM79/ SAA/ CB/ CE/ IK08/ RoHS

### TECHNICAL PARAMETERS

Power	450- 900W
Input	120-277VAC or 220-240VAC or 347-480VAC
PF	>0.95
THD	<20%
L85	>60,000H
Operating Temperature	-40F- 122F
Efficacy	120-140lm/W
ANSI CCT	3000K/4000K/5000K/5700K
Min CRI	70* or 80 or 85
IP Rating	IP67
SPD	Optional
DALI	Optional
1-10V	Optional
Photocell	/
Smart Control	/
Optic (IESNA)	Type I, Type II, Type III, Type IV, Type V
Color Options	Grey/Black/Bronze/White

\* Standard

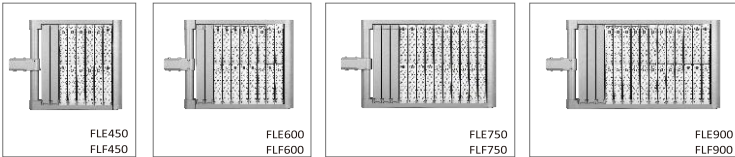

### ORDERING INFORMATION

Example :FLE900-T5S-50K-GR-00

MODEL (Nominal Power)		OPTIC LENS	CCT (ANSI)	OPTIONAL COLOR	LIGHTING CONTROL	ACCESSORY INFO
120-277VAC or 220-240VAC (75W/module)	347-480VAC (75W/module)					
FLE450	FLF450*	T1M	30K	★ BK	00	Bird Spike
FLE600	FLF600*	T2M	★ 40K	GR	Not required	
FLE750	FLF750*	T3M	★ 50K	BZ	01	10KA/20KA Surge Protection Device
FLE900	FLF900*	T3L	57K	WH	Photocell	
		T4S			02	Back Light Shield
		T4M			Motion Sensor	
		T5U			03	Safety Cable
		T5V			Photocell + Motion Sensor	
		T5W				
		T5S				
		T5M			04	
		T5L			DALI	
		T5X			05	
					1-10V dimming	

\* DALI & Motion sensor unavailable

★ Regularly stocked item