

LED CANOPY LIGHT

ENYA Series



When compared to similar LED solutions in a canopy application, the ENYA fixture stands out from the crowd with its unique design which significantly reduces labor and maintenance cost.

FEATURES & BENEFITS


- Die cast aluminum housing.
- Modular design allows for easy installation, replacement and maintenance.
- Corrosion resistant polyester powder painted 100µm thickness.
- Meets a 1000-hour salt spray certification per ASTM B117/ ISO 9227:2012.
- Precision lens system provides optimized illumination for intended area.
- High quality LEDs, driver and components, e.g. MOLEX, WAGO connectors.
- Multiple lighting control options are available, e.g. DALI, 1-10V.
- 10 years limited warranty available.

CERTIFICATIONS

CB/ CE/ RoHS/ IK08

TECHNICAL PARAMETERS

Power	60- 160W
Input	120-277VAC or 220-240VAC or 347-480VAC
PF	>0.95
THD	<20%
L85	>60,000H
Operating Temperature	-40F- 122F
Efficacy	120-140lm/W
ANSI CCT	3000K/4000K/5000K/5700K
Min CRI	70* or 80 or 85
IP Rating	IP65
SPD	Optional
DALI	Optional
1-10V	Optional
Photocell	/
Smart Control	Optional
Optic (IESNA)	Type I, Type II, Type III, Type IV, Type V
Color Options	White

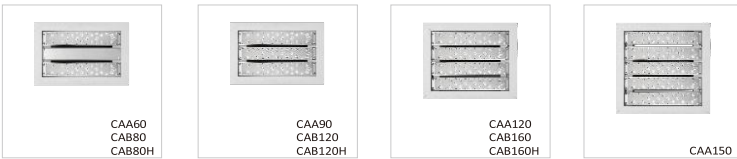

* Standard

ORDERING INFORMATION

Example : CAA90-T5S-50K-WH-05

MODEL (Nominal Power)			MOUNTING	OPTIC LENS	CCT (ANSI)	OPTIONAL COLOR	LIGHTING CONTROL	ACCESSORY INFO
120-277VAC or 220-240VAC (30W/module)	120-277VAC or 220-240VAC (40W/module)	347-480VAC (40W/module)						
CAA60 CAA90 CAA120 CAA150	CAB80 CAB120 CAB160	CAB80H* CAB120H* CAB160H*	-	T1M T2M T3M T3L T4S T4M T5U T5V T5W T5S T5M T5L T5X	30K ★ 40K ★ 50K 57K	★ WH	00 Not required 04 DALI 05 1-10V dimming	10KA/20KA Surge Protection Device Back Light Shield Emergency Power Supply (EPS)

* DALI & Motion sensor unavailable

★ Regularly stocked item