

LED AREA LIGHT

GAMA-T Series



GAMA-T is highly suitable for car parks and shop fronts where direct lighting is required. A simple yet functional modular design, combined with the right lens type, will improve lighting proficiency.

FEATURES & BENEFITS

- Shoe box appearance with advanced LED system.
- Modular design allows for easy installation, replacement and maintenance.
- Corrosion resistant polyester powder painted 100µm thickness.
- Meets a 1000-hour salt spray certification per ASTM B117/ ISO 9227:2012.
- Interchangeable with the other GAMA Series with a bracket change.
- Multiple lighting control options are available, e.g. DALI, 1-10V.
- 10 years limited warranty available.


CERTIFICATIONS

UL/ CUL/ DLC/ LM79/ SAA/ CB/ CE/ ENEC/ ErP/ RoHS/ IK08

TECHNICAL PARAMETERS

Power	30- 320W
Input	120-277VAC or 220-240VAC or 347-480VAC
PF	>0.95
THD	<20%
L85	>60,000H
Operating Temperature	-40F- 122F
Efficacy	120-140lm/W
ANSI CCT	3000K/4000K/5000K/5700K
Min CRI	70* or 80 or 85
IP Rating	IP65
SPD	Optional
DALI	Optional
1-10V	Optional
Photocell	/
Smart Control	/
Optic (IESNA)	Type I, Type II, Type III, Type IV, Type V
Color Options	Black/Grey/Bronze/White

* Standard

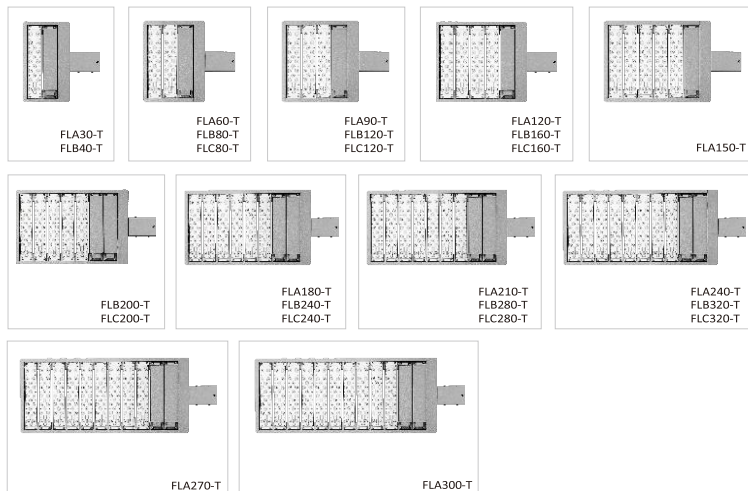

ORDERING INFORMATION

Example : FLA30-T-T5S-50K-BK-00

MODEL (Nominal Power)			MOUNTING	OPTIC LENS	CCT (ANSI)	OPTIONAL COLOR	LIGHTING CONTROL	ACCESSORY INFO
120-277VAC or 220-240VAC (30W/module)	120-277VAC or 220-240VAC (40W/module)	347-480VAC (40W/module)						
FLA30 FLA60 FLA90 FLA120 FLA150 FLA180 FLA210 FLA240 FLA270 FLA300	FLB40 FLB80 FLB120 FLB160 FLB200 FLB240 FLB280 FLB320	FLC80* FLC120* FLC160* FLC200* FLC240* FLC280* FLC320*	T	T1M T2M T3M T3L T4S T4M TSU TSV TSW TSS TSM TSL TSX	30K ★ 40K ★ 50K 57K	★ BK GR BZ WH	00 Not required 01 Photocell 02 Motion Sensor 03 Photocell + Motion Sensor 04 DALI 05 1-10V dimming	Adaptor Bracket 3/5/7-pin NEMA Receptacle 20KA Surge Protection Device Safety Cable

* DALI & Motion sensor unavailable

★ Regularly stocked item